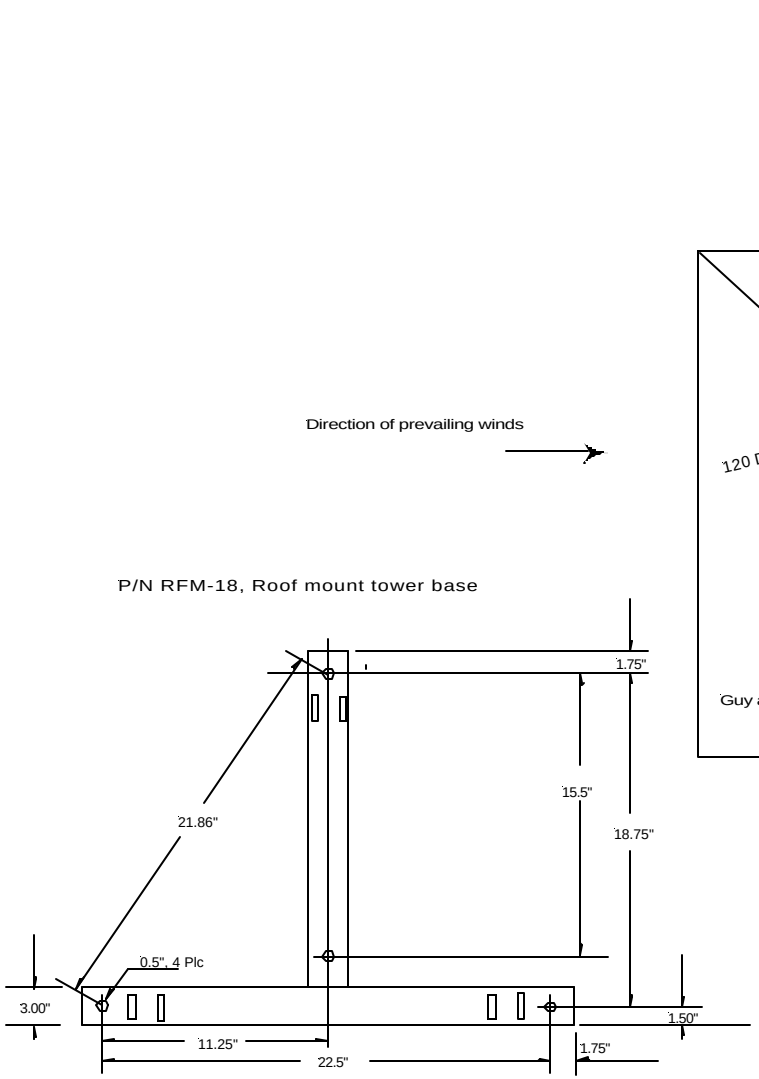

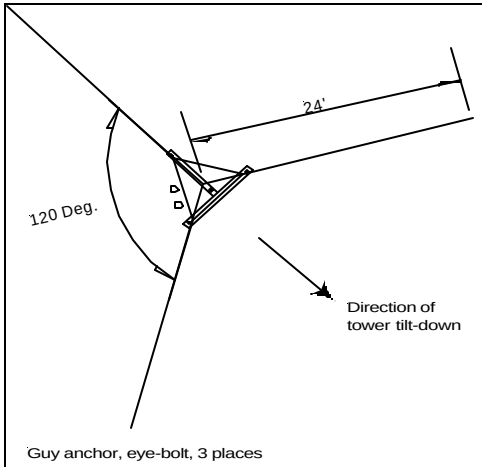

NOTES.

1. Use 1/2"mounting bolts, 4 places for tower base. Bolts to extend at least 1.5" above roof surface. Refer to base drawing for bolt pattern detail.

2. Provide 2 each, conduits (1 for AC power, 1 for signal lines) Position conduits on either of the sides which are not in the tower tilt-down direction. Conduit size subject to local codes.

1. Actual mounting detail will vary depending on building type. Consult with responsible civil engineer for your specific requirements.

Typical flat-roof installation
of a C33HD tower. NO SCALE.