
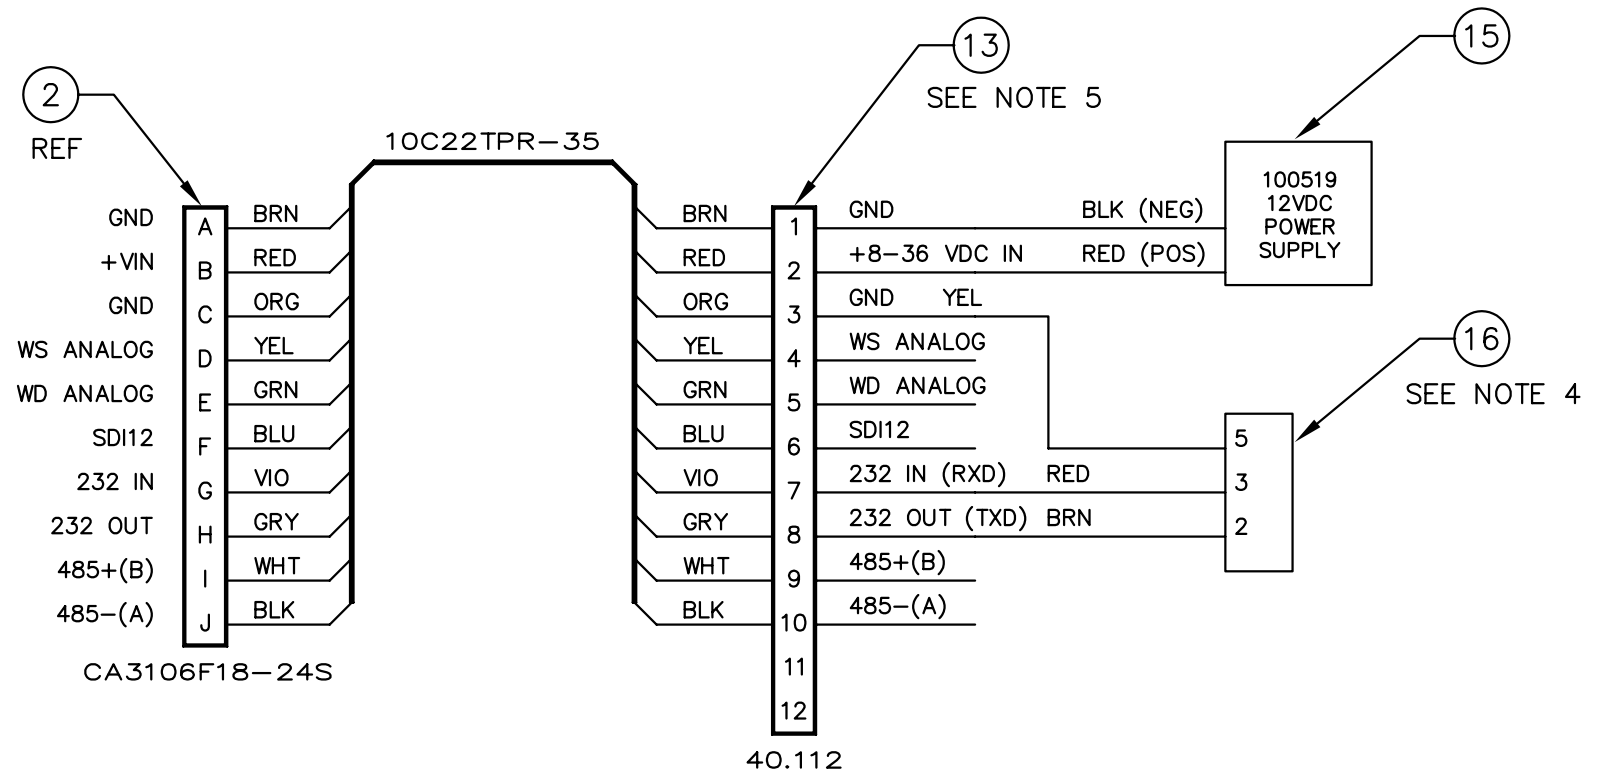


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-	RELEASED FOR PRODUCTION		

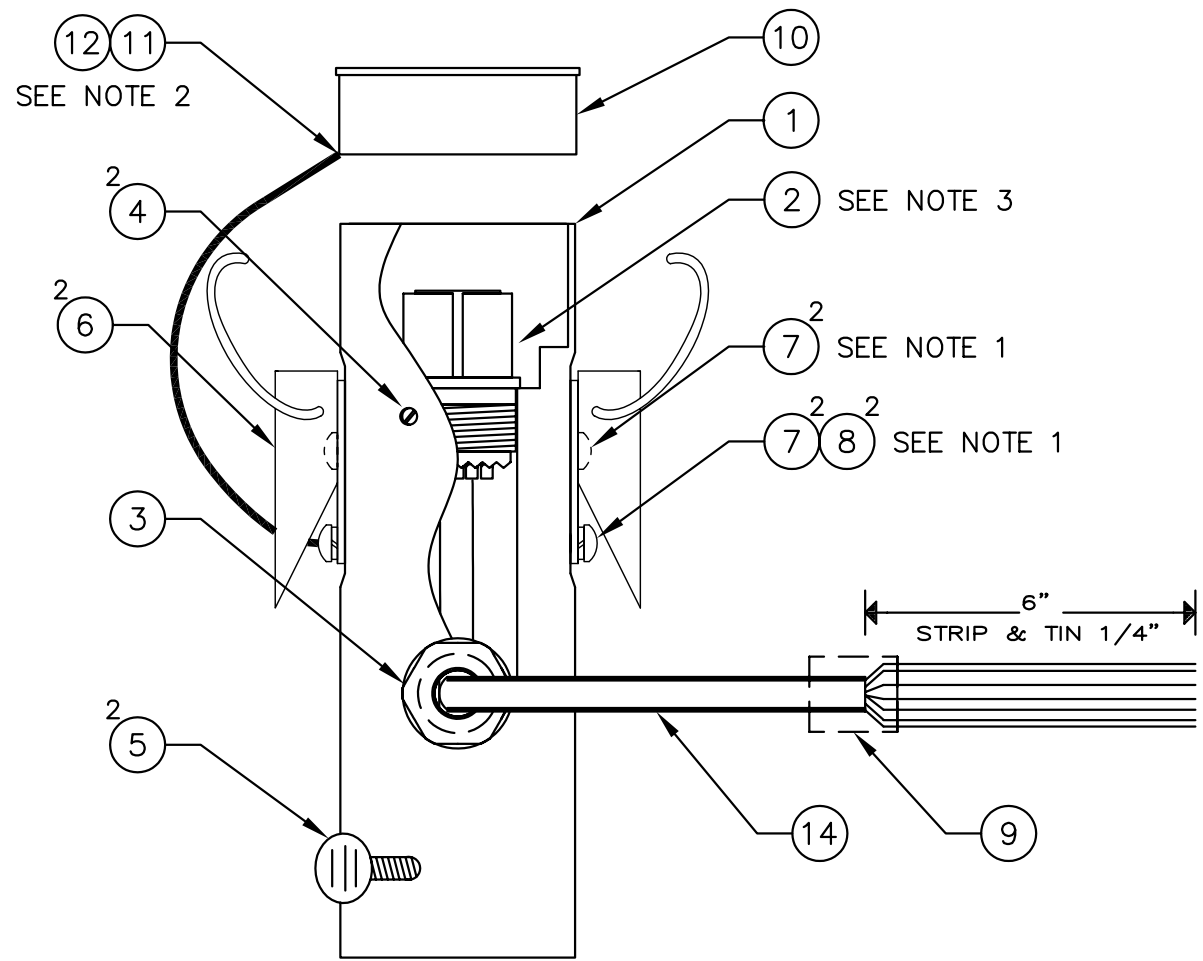

NOTES:

- 1) ONLY USE LOCKWASHERS WHERE SHOWN. USE LOCTITE ON ITEM 7.
- 2) INSTALL LANYARD ON SIDE OF CAP WITH RIVET FROM THE OUTSIDE (INSIDE MUST BE FLAT). ATTACH LANYARD TO BOTTOM SCREW ON LATCH. RIVET MUST BE TIGHT.
- 3) POT ITEM 2 WITH FERRULE PROVIDED AND DP-270 POTTING COMPOUND.
- 4) MODIFY SERIAL CABLE (ITEM 16), CUT MALE CONNECTOR OFF AS CLOSE TO CONNECTOR AS POSSIBLE, STRIP JACKET BACK 4", CUT BACK ALL UNUSED WIRES, STRIP AND TIN WIRES 1/4".
- 5) INSTALL 3" X .5" VELCRO ON BACK OF ITEM 13.


N/A	S2, AIO
NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
 $\pm 1/64$.XX $\pm .010$ $\pm 1^\circ$
.XXX $\pm .005$

CONTRACT NO.	
APPROVALS	DATE
DRAWN C.HAPP	03/08
CHECKED D.ADAMS	03/08
ISSUED D.ADAMS	

MATERIAL
NOT APPLICABLE
FINISH
NOT APPLICABLE
DO NOT SCALE DRAWING

SCALE: NONE



140 Wilbur Place
Airport International Plaza
Bohemia, NY 11716
USA
FAX (631)567-7585 Phone (631)567-7300

**QUICK MOUNT,
AIO, S2**

SIZE B	FSCM NO. 52332	DWG. NO. 102778-2100	REV. -
-----------	-------------------	-------------------------	-----------

P: \Drawings\Assembly\102778-2100.dwg SHEET 1 OF 1